

ATOM-75-480-240-AP1-80-EMS **Product Datasheet**



Overview

- 75KVA class
- Feeds up to (6) 80A/19.2KW ports:
- Service entrance rated
- Fully assembled and integrated from primary input to branch circuit output.
- Single LTE connection.
- Access Controls: QR Code
- Integral Energy Management System (EMS):

# of Ports Charging	Output per Port (amps)	Output per Port (kW)	System Output (kW)	System Amps	MPH charging	Time to Charge (hrs):
1	80	19.20	19.2	80	64.0	0.6
2	80	19.20	38.4	139	64.0	0.6
3	80	19.20	57.6	139	64.0	0.6
4	60	14.40	57.6	159	48.0	0.8
5	48	11.52	57.6	166	38.4	1.0
6	48	11.52	69.1	166	38.4	1.0

Pedestal Dual-port

Wallbox Dual-port

(based on average 40 mile refill and 300 wh/mile vehicle efficiency)

Compatible Charge Ports (all cables J1772 at 25')

Pedestal Dual Port

Representative product image. Final product may vary in appearance & layout.

75KVA

Yes

400A

6

100A/80A

N3R

Core Technical Specifications

EMS per NEC Article 750

System KVA Class

125A		
480VAC, 3ph 4W (service) 480VAC, 3ph 3W (feeder)		
240VAC, 3ph, 3W		
59"L x 40"W x 79.3"H		
~1,100-lbs		
75		
Δ-Δ		
150°C		
220°C		
Aluminum		
N3R		
Enclosed Circuit Breaker		
125A		
35K		
N3R		
Yes		
Yes		

Panel Rating

Enclosure

	cucstal Dual Fort	Cable-Managed	VValibox Edai port		
Stand	lard Options (see last page)	age for details)	av.		
OP1	Electrical Grounding Kit				
OP2	Skid Mounting - On Ground				
OP3	Skid Mounting - On Concrete				
OP4	Pedestal Mounting - On Ground				
OP5	Pedestal Mounting - On Concrete				
Softw	vare Options (see last pa	age for details)			
SW	Atom Insight Plus				


Max. Number of branch EVSE


Atom Switch rating/charge rate

EVSE Branch Panel





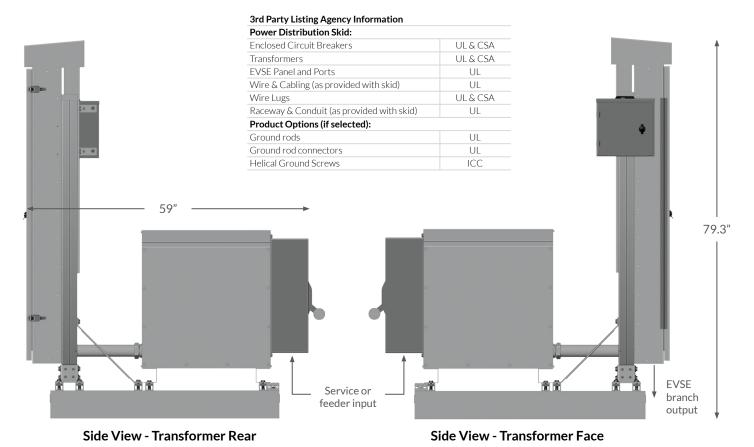

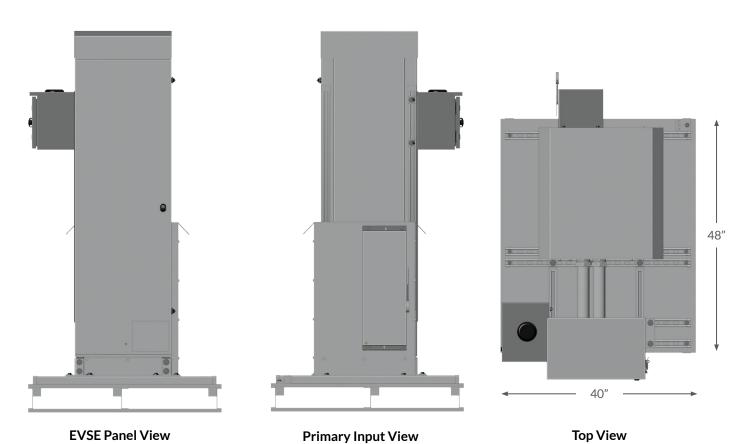



Standard Options



OP1: Electrical Grounding Kit - includes 2 ground rods, 2 ground rod connectors and 30' of grounding electrode conductor (#2 AWG CU bare or #1/0 AWG CU bare, depending on SKU)



OP2: Skid Mounting - On Ground - includes 4 ICC Certified helical ground screws (3" x 63" ea.), 4 support flanges (6" x 6") and necessary hardware for anchoring skid to ground.



OP3: Skid Mounting - On Concrete - includes 3/8" x 3" concrete anchors, brackets and necessary hardware for anchoring skid to concrete slab.



OP4: Pedestal Mounting - On Ground - includes 1 helical ground screw, 1 support/mounting flange and necessary hardware for anchoring pedestals to ground.



OP5: Pedestal Mounting - On Concrete - includes % x 3" concrete anchors (per pedestal) for anchoring to concrete.

Software - Atom Insight Plus



Mobile App





Atom Insight Plus Software Subscription includes:

Remote visibility and control of Atom EV charging stations including Driver Mobile App (web or native). 24/7 network monitoring, Remote troubleshooting, Local Access Control, Driver Access Groups, Multi-Site Management, Multi-User Account Management, Analytics & Reporting, and Host management capabilities to manage access to charging stations and fee policies.

Additional policies include: Driver Reservations, Driver Support, Host Support, Revenue Collection, Direct Deposit, Tiered Pricing, Time-of-Use Rates, Session limits & Idle Fees, Parking & Activation Fees for complete Revenue Management.

NOTE: Additional credit card transaction fees apply. User Guide