

ATOM-112-480-240-AP1-80-EMS **Product Datasheet**



Overview

- 112KVA class
- Feeds up to (6) 80A/19.2KW ports:
- Service entrance rated
- Fully assembled and integrated from primary input to branch circuit output.
- Single LTE connection.
- Access Controls: QR Code
- Integral Energy Management System (EMS):

# of Ports Charging	Output per Port (amps)	Output per Port (kW)	System Output (kW)	System Amps	MPH charging	Time to Charge (hrs):
1	80	19.20	19.2	80	64.0	0.6
2	80	19.20	38.4	139	64.0	0.6
3	80	19.20	57.6	139	64.0	0.6
4	80	19.20	76.8	212	64.0	0.6
5	70	16.80	84.0	242	56.0	0.7
6	70	16.80	100.8	242	56.0	0.7

Pedestal Dual-port

Cable-Managed

Wallbox Dual-port

(based on average 40 mile refill and 300 wh/mile vehicle efficiency)

Compatible Charge Ports (all cables J1772 at 25')

Pedestal Dual Port

Representative product image. Final product may vary in appearance & layout.


Core Technical Specifications							
System KVA Class	112KVA						
EMS per NEC Article 750	Yes						
Input Circuit	175A						
Primary (input) Voltage	480VAC, 3ph 4W (service) 480VAC, 3ph 3W (feeder)						
Secondary Voltage	240VAC, 3ph, 3W						
Dimensions (overall)	59"L x 40"W x 79.3"H						
Skid Weight	~1,300-lbs						
Transformer Data							
KVA rating	112.5						
Configuration	Δ-Δ						
Temp. Rise	150°C						
Insulation Rating	220°C						
Winding material	Aluminum						
Enclosure	N3R						
Primary (input) OCP data							
Туре	Enclosed Circuit Breaker						
Trip Rating	175A						
AIC Rating	35K						
Enclosure	N3R						
Service Entrance Rating	Yes						
Neutral kit	Yes						
EVSE Branch Panel							
Panel Rating	400A						
Max. Number of branch EVSE	6						
Atom Switch rating/charge rate	100A/80A						
Enclosure	N3R						

r caestar Baarr ort		Cable-Managed	Transox Baar por c			
Stand	lard Options (see next p	page for details)				
OP1	Electrical Grounding k					
OP2	Skid Mounting - On Ground					
OP3	Skid Mounting - On Concrete					
OP4	Pedestal Mounting - On Ground					
OP5	Pedestal Mounting - On Concrete					
Softw	vare Options (see follow	ving page for details)				
SW	Atom Insight Plus					



Top View



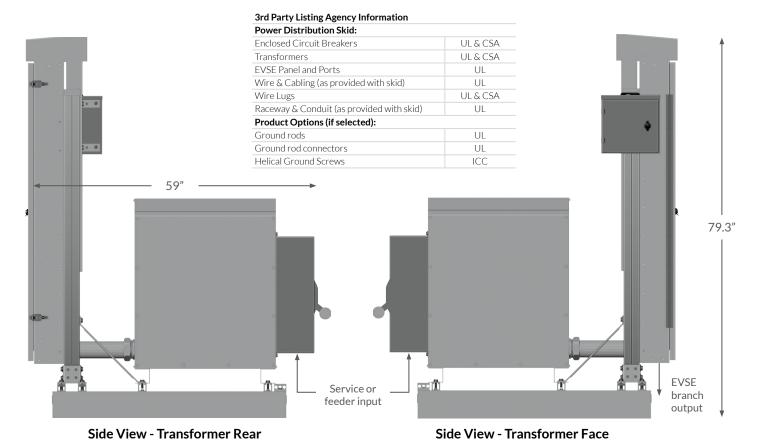

48"

Primary Input View

EVSE Panel View



Standard Options



OP1: Electrical Grounding Kit - includes 2 ground rods, 2 ground rod connectors and 30' of grounding electrode conductor (#2 AWG CU bare or #1/0 AWG CU bare, depending on SKU)



OP2: Skid Mounting - On Ground - includes 4 ICC Certified helical ground screws (3" x 63" ea.), 4 support flanges (6" x 6") and necessary hardware for anchoring skid to ground.



OP3: Skid Mounting - On Concrete - includes 3/8" x 3" concrete anchors, brackets and necessary hardware for anchoring skid to concrete slab.



OP4: Pedestal Mounting - On Ground - includes 1 helical ground screw, 1 support/mounting flange and necessary hardware for anchoring pedestals to ground.



OP5: Pedestal Mounting - On Concrete - includes % x 3" concrete anchors (per pedestal) for anchoring to concrete.

Software - Atom Insight Plus



Mobile App





Atom Insight Plus Software Subscription includes:

Remote visibility and control of Atom EV charging stations including Driver Mobile App (web or native). 24/7 network monitoring, Remote troubleshooting, Local Access Control, Driver Access Groups, Multi-Site Management, Multi-User Account Management, Analytics & Reporting, and Host management capabilities to manage access to charging stations and fee policies.

Additional policies include: Driver Reservations, Driver Support, Host Support, Revenue Collection, Direct Deposit, Tiered Pricing, Time-of-Use Rates, Session limits & Idle Fees, Parking & Activation Fees for complete Revenue Management.

NOTE: Additional credit card transaction fees apply. User Guide